


Storage Registers Worksheet

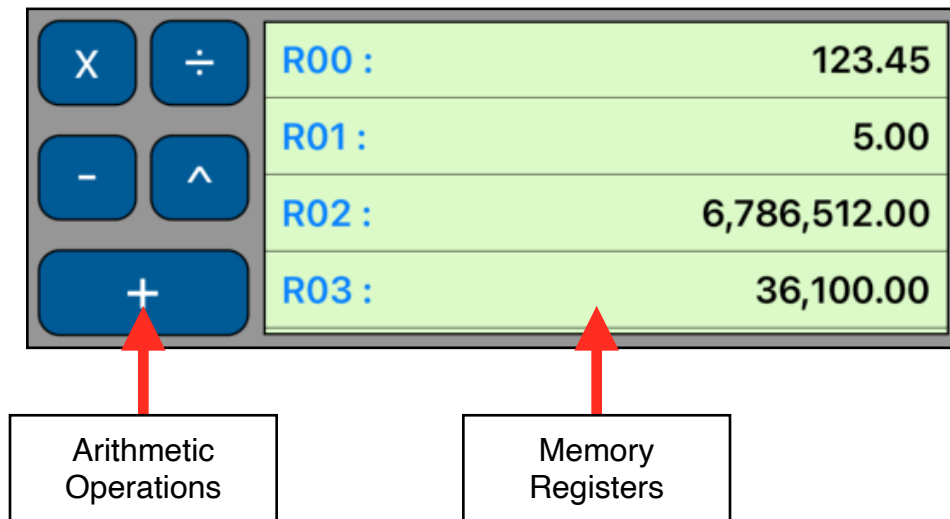

This worksheet lets you see, store and perform arithmetic operations over the values in the storage registers in a direct way. To show it, select the “Utilities” menu and touch “Storage Registers” option.

Anytime you touch one of the storage register shown in the listing, the displayed number will be stored in it. To perform an arithmetic operation, touch the desire operation (the button will turn green) and then the memory register to operate with. To recall a storage register value to the calculator just press [**RCL**] and touch the desire memory register in the listing.

Example:

Perform the following operations: store 95 in memory 3, add 65 to it, subtract 30, multiply by 95, divide by 65, raise to the 2nd power and finally racall the result.

Solution:

Keystrokes	Description
type 95, touch R03	Stores 95 in memory register 3. R[3] = 95.00
65 [+] R03	Adds 65 to memory register 3. R[3] = 160.00
30 [-] R03	Subtracts 30 from memory register 3. R[3] = 130.00
95 [x] R03	Multiply memory register 3 by 95. R[3] = 12,350.00
65 [÷] R03	Divide memory register 3 by 65. R[3] = 190.00
2 [^] R03	Raise memory register 3 to 2. R[3] = 36,100.00
[RCL] R03	Recalls the memory register 3 value to the display.